


**Ideal for  
Troubleshooting  
or Tool Setup!**

**Accurately Measure Flowrates  
BTUs & Temperatures.  
No need to guess!  
Portable LCD Unit**



\* Connector not shown.

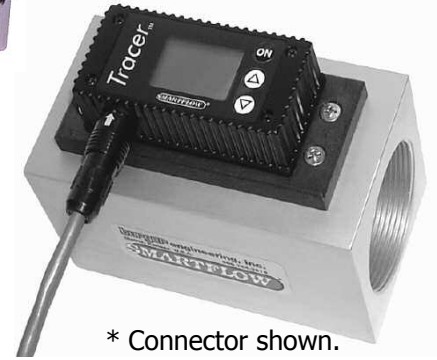

\* Connector shown.

**Specifications**

**Wetted Parts**

- Flowmeter Body.....Nickel-Plated Brass
- Sight Window.....Polysulfone
- Impeller.....Nylon 6/12
- Impeller Shaft.....303 Stainless Steel
- Magnet.....Neodymium

**Power**

- Battery.....3.6V 1.0A LithiumTadiran 5902
- Battery Life.....40-50hrs

**Temperature**


- Range .....32°F-230°F (0°C to 110°C)
- Accuracy.....±2% of display value
- Repeatability.....±1% of display value

**Environmental**

- Pressure.....150 psi max

**Features and Benefits**

- **Bi-directional Flow Reading**
- **English or Metric Units**
- **Optional Quick Connect Fittings\***
- **Corrosion Resistant Wetted Parts**
- **Polysulfone Viewing Window**
- **Automatic Display Shutoff**
- **Weather tight Housing**

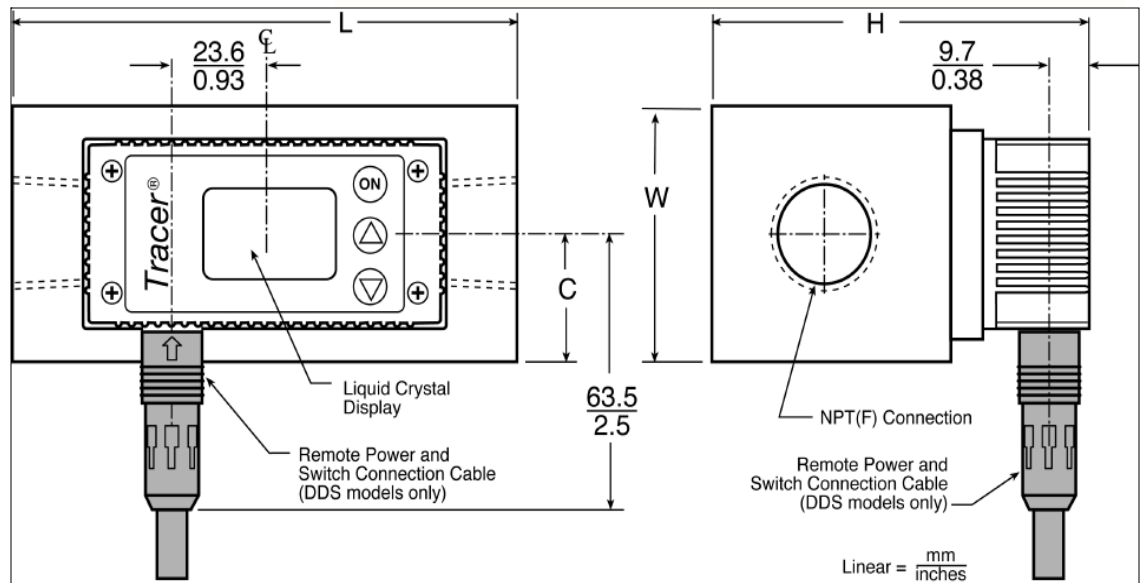

**CALL FOR MORE  
INFORMATION!!**

**Tevac Model Numbers and Specifications**

| Model # | Connection Size           | Flow Range | Accuracy* | Repeatability | Flow Range | Accuracy* | Repeatability |
|---------|---------------------------|------------|-----------|---------------|------------|-----------|---------------|
| B-DD-3B | 3/8" NPT F                | .5-5.0 gpm | ±3%       | ±3%           | .5-5.0 gpm | ±3%       | ±3%           |
| B-DD-3E | 3/8 Quick Connect Fitting |            |           |               |            |           |               |